

# Synthopol Product NEWS

03/2018

## Synthalat QWK 3517

water-based acrylic-modified alkyd resin

**Synthalat QWK 3517 is ideal for industrial applications such as aqueous primers and single-coat paints.**

### FIELD OF APPLICATION

Synthalat QWK 3517 can be used for various aqueous Industrial applications. From a primer to single coat paint (DTM) and top coat or stoving enamel, our product can be used for matt to high-gloss paints. The universal adhesion on various substrates (steel, aluminum, zinc) can be emphasised as well as the co-free drying with very good early water resistance. Furthermore the weather resistance tests were extremely positive.


### HIGHLIGHTS

- versatily applicable
- very good weather resistance
- both matt and high-gloss coatings
- universal adhesion
- very good early water resistance



## PROPERTIES AND TECHNICAL DATA

Oil-length	Short-oil
Viscosity/ 23°C	100 – 900 mPas
NVC	45 +/-1 %
pH-value (10% dilution in water)	7.8 – 8.8

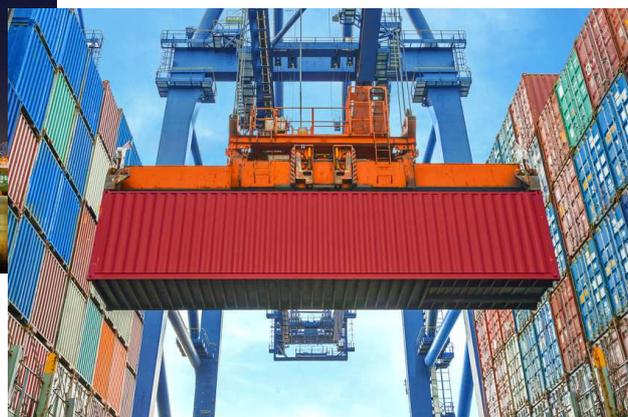

### SAMPLING

Ordering samples of Synthalat QWK 3517 can be done easily on our website.

### CONTACT

If you are interested in more information about our products (Guide Formulations, Datasheets), please contact your known person in charge from the sales or research and development department or our headquarters directly under following references:

#### SYNTHOPOL DEUTSCHLAND

Dr. rer. pol. Koch GmbH & Co. KG  
Alter Postweg 35  
D-21614 Buxtehude

Telefon: +49 (0) 4161/7071-0

Telefax: +49 (0) 4161/80130

info@synthopol.com  
www.synthopol.com